


FRESA BATTUTE SMUSSI

DESCRIZIONE

Fresa a smussare da D.140 a D.180 per smussi a 22.5°-30°-45° + spigolatura-raggiatura regolabile

INFORMAZIONI TECNICHE

UTENSILI CON COLTELLI
STANDAR E CARRELLI
PORTA INSERTI REGOLABILI

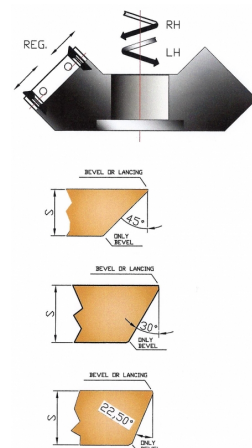

COD. ARTICOLO	D	H	d	ROT	Z	SUPPORT	ANGLE	S
MEC1.G.01	160	50	35-40	RH	2	4	45°	35,36
MEC1.G.02	160	50	35-40	LH	2	4	45°	35,36
MEC1.G.03	180	60	35-40	RH	2	4	45°	42,43
MEC1.G.04	180	60	35-40	LH	2	4	45°	42,43
MEC1.G.05	160	50	35-40	RH	2	4	30°	43,30
MEC1.G.06	160	50	35-40	LH	2	4	30°	43,30
MEC1.G.07	160	50	35-40	RH	2	4	22.5°	46,19
MEC1.G.08	160	50	35-40	LH	2	4	22.5°	46,19